



F4000N-SR Series Soldering Robot

The F4000N-SR series 4-axis soldering robot is all-in-one effective solution for precision iron tip soldering applications in the electronics industry.

A wide range of precise specially designed quick connect solder tips are available allowing the 200W soldering iron to be tailored to the specific soldering application process.

A fully integrated temperature controller, cleaning station, solder wire feeder and remote operation box are included for increased productivity and performance.

Soldering positions and parameters are quickly and easily created using the intuitive teach pendant software.

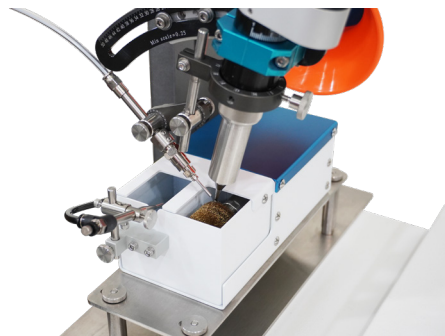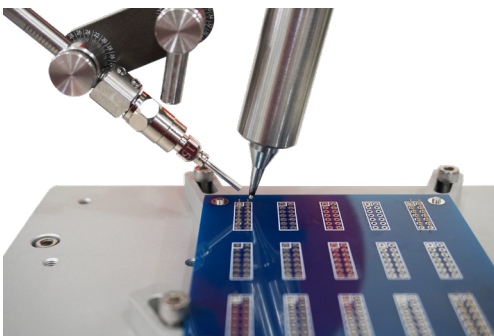

Features

- Working area up to 365 x 400mm
- Axis repeatability +/- 0.01mm
- Adjustable Angle soldering iron and wire feed bracket assembly
- Versatile range of quick connect solder tips
- Floating tool head
- Fume extraction arm
- 200W Soldering Iron with digital temperature control unit
- Solder wire feeder (0.4mm - 1.2mm)
- Solder tip cleaning Station
- Remote operation box

Benefits

- Poka-Yoke designed soldering tips can be quickly and easily changed without mistake
- Sleep Mode function on Digital temperature control unit, switches off heat supply to maximise solder
- Position of Solder wire outlet to tip can be easily adjusted to optimise quality of the solder joint
- Solder Wire Feeder is able to detect broken wire or end of reel.
- Cleaning station is fitted with a rotating brass brush and air blower to maintain process quality and maximize life of the solder tip.
- Floating tool head design prevents accidental damage to soldering tip.

F4000N-SR Series Soldering Robot



Specifications

Item Number	F4304N-SR	F4404N-SR
Working Area X/Y/Z/R	265 x 300 x 100mm x +/- 360 deg	365 x 400 x 100mm x +/- 360 deg
Max Speed (X&Y/Z/R)	600mm / 320mm / 720deg / sec	
Repeatability	+/- 0.01mm	
Drive System	3-Phase Micro Stepping Motor	
Max Soldering Temperature	460C	
Soldering Iron Power	200W	
Solder Wire Size	0.5 - 1.2mm	
Data Memory	1-100 programs / 9,999 points per program	
Data Storage	CF Card / USB	
Air Supply	Max 100 psi (6.9 Bar)	
Power Supply	Auto-switching 100-230VAC, 450W	
Dimensions (W/D/H)	695 x 546 x 1020mm	795 x 646 x 1020mm
Weight	58 kg	65 kg
Approvals	CE, RoHS, WEE	

Contact Us

USA
info@fisnar.com
 1 (262) 253-8600

Europe
infoeurope@fisnar.com
 +44 (0) 1355 577222

Asia
info@fisnar.com.hk
 +852 2389-2827

India
info@fisnar.in
 +91-11-4556-6223-5